GAGE NO.	'A'	'B'	'C'
FG404/FG904	20	15	11 1/4
FG405/FG905	20 5/8	16 1/8	11 7/8
FG406/FG906	21 3/8	17 3/8	12 5/8
FG407/FG907	22 1/8	18 1/2	13 3/8
FG408/FG908	23 1/8	20 1/8	14 3/8
FG409/FG909	23 1/2	20 7/8	14 3/4
FG1504	22 1/2	17 1/2	13 3/4
FG1505	22 1/2	18 5/8	13 3/4
FG1506	22 1/2	19 7/8	13 3/4
FG1507	22 1/2	21	13 3/4
FG1508	22 5/8	19 7/8	13 3/4
FG1509	23 3/8	21	13 3/4

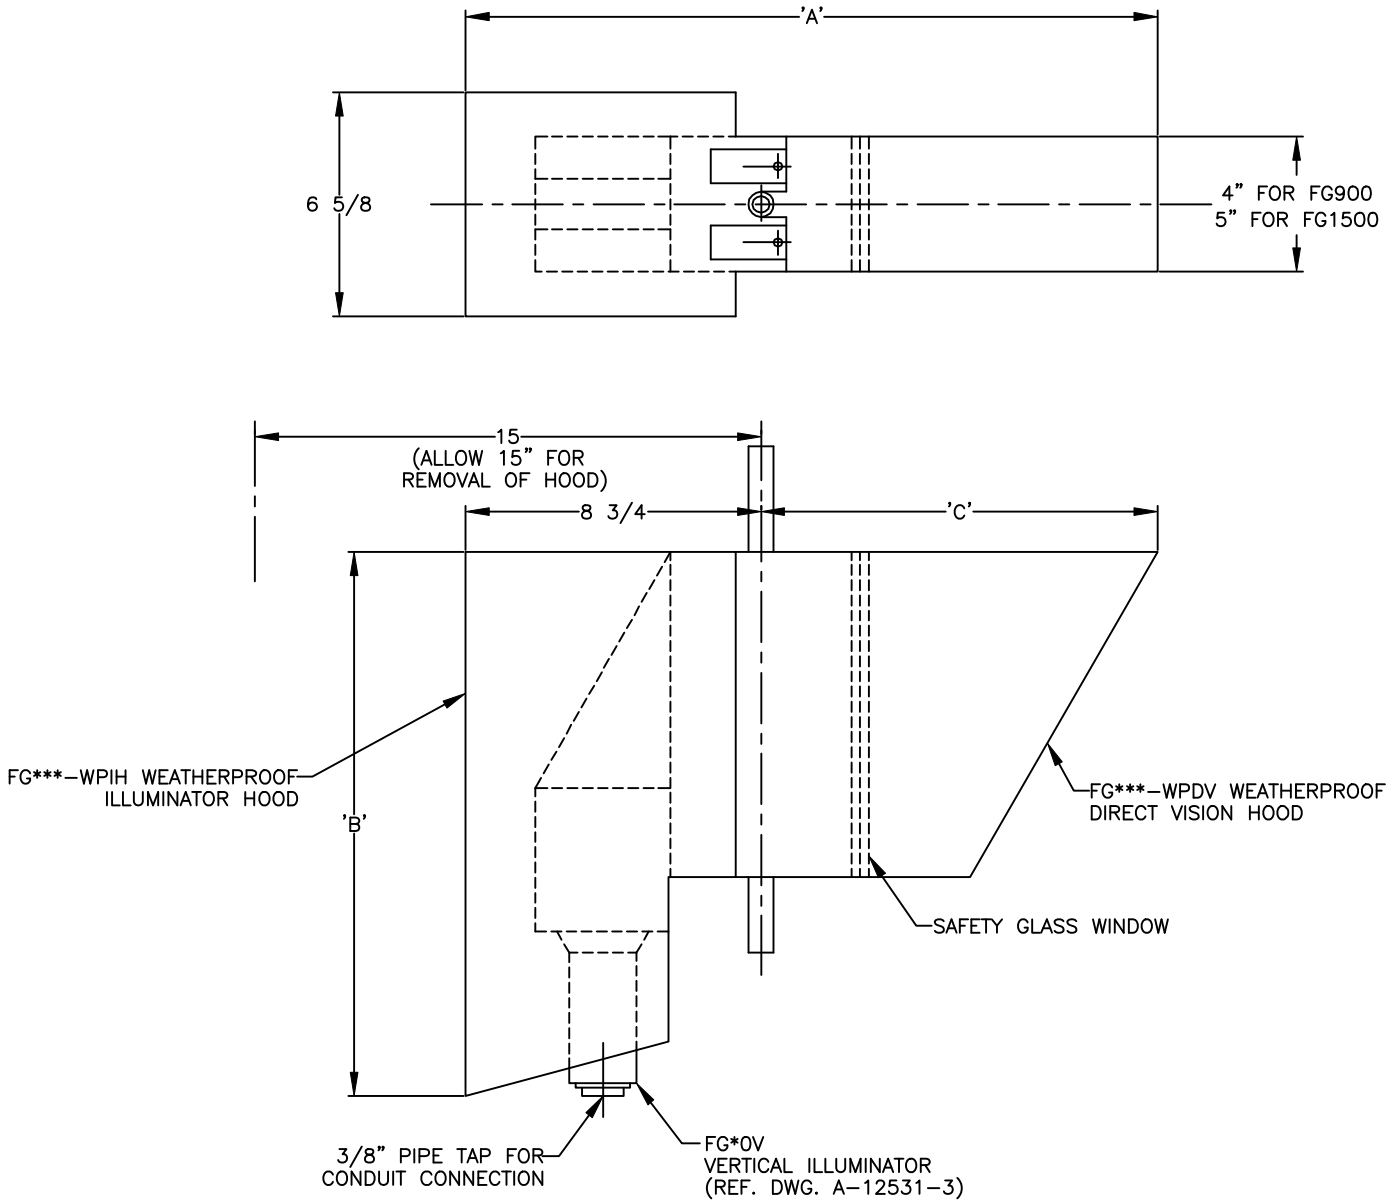

NOTE: TOP, SIDES, FRONT, AND REAR ARE ENCLOSED WITH 20 GA. 304 STN. STL. FOR OUTDOOR INSTALLATION.

REV	DESCRIPTION	DATE	SIG
3	UPDATE–NEW MODEL NOS.	5–10–93	FAS

REVISIONS

UNLESS OTHERWISE NOTED:
TOLERANCES (†)
DECIMAL & STOCK (.002)
FIN. FRACTIONAL (UP TO 1", NOT INCL.) (.010)
FIN. FRACTIONAL (1" INCL., UP TO 3") 1/64
FIN. FRACTIONAL (3" INCL., UP TO 6") 1/32
FIN. FRACTIONAL (6" INCL., UP TO 12") 1/16
FIN. FRACTIONAL (12" & OVER) 1/8
ANGLES 1°
MACHINE FINISH– 125 √ OR SMOOTHER
REMOVE BURRS AND SHARP EDGES

THE CLARK–RELIANCE CORP.
STRONGSVILLE, OHIO

FG400, FG900,& FG1500 SERIES
WEATHERPROOF DIRECT VISION
ILLUMINATION ASSEMBLY

MATERIAL

DRAWN FAS | SCALE NONE
CHKD. | DATE 5–10–93

DRAWING NO. A–7987

REV. 3