
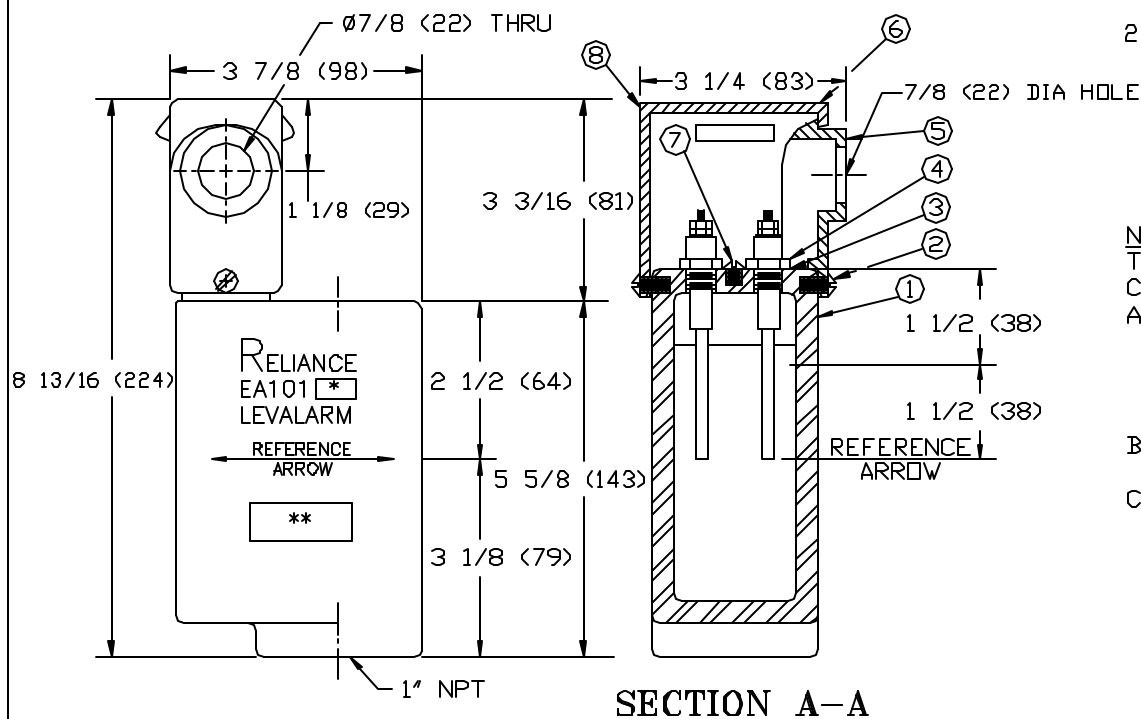


BILL OF MATERIAL

ITEM	P/N	QTY	DESCRIPTION	MAT'L	DWG NO
1	EA101S 1	1	BODY	CAST STEEL	A-13879
2	X172993	2	RD HD MACH SCREW 12-24X3/8	STEEL	
3		2	ELECTRODE FITTING GASKET		
4		2	ELECTRODE FITTING		
5	EA15R 22	1	CONDUIT BRACKET	ALUMINUM	B-8697
6	EA100 18	1	ELECTRODE FITTING HOUSING	ALUMINUM	B-8697
7	X172990	1	COMMON CONN. SCREW, 12-24X1/4	STEEL	
8	X174610	1	LEVALARM NAME PLATE	ALUMINUM	A-7863

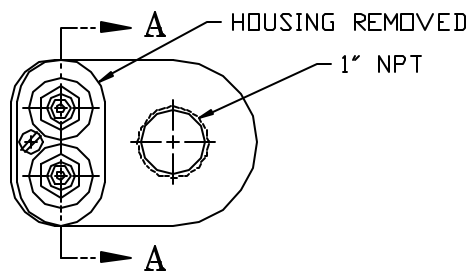

NOTE:

- ITEMS 3 AND 4, PROBES AND GASKETS:
- FOR STEAM SERVICE FROM 451 TO 1000 WSP FURNISH EA15-5V ELECTRODE FITTING AND X175500 GASKET
 - FOR STEAM SERVICE FROM 1001 TO 1800 WSP FURNISH EA15-5Z ELECTRODE FITTING AND E10-10S GASKET

NOTE ON APPLICATION:

- THIS EA101 LEVALARM CAN BE USED FOR THE FOLLOWING CONTROL AND ALARM FUNCTIONS:
- WITH ONE PROBE AND ONE RELAY, EITHER:
 - HIGH ALARM
 - LOW ALARM
 - FUEL CUTOFF
 - LOW ALARM AND FUEL CUTOFF (SAME LEVEL)
 - WITH TWO PROBES AND ONE RELAY
 - PUMP CONTROL (FOR LEVEL DIFFERENTIALS UP TO 3")
 - WITH TWO PROBES AND TWO RELAYS, EITHER:
 - DUAL FUEL CUTOFF
 - LOW ALARM AND FUEL CUTOFF (DIFFERENT LEVELS)

NOTE ON LETTERING:

- * STAMP 'S' ON CAST STEEL BODY (EA101S LEVALARM)
- ** PRESSURE BLOCK TO BE STAMPED:
 - 1800 PSI (FOR TANK SERVICE, USING EA15-5T ELECTRODES)
 - 450 WSP (FOR STEAM SERVICE, USING EA15-5V ELECTRODES)
 - 1000 WSP (FOR STEAM SERVICE, USING EA15-5V ELECTRODES)
 - 1800 WSP (FOR STEAM SERVICE, USING EA15-5Z ELECTRODES)

LOCATE PROBE LEVELS WITH RESPECT TO REFERENCE ARROW

HYDROTEST: 2700 PSI

MATERIAL: SEE TABLE		CLARK-RELIANCE CORP. STRONGSVILLE, OHIO, U.S.A.	EA101S LEVALARM ASSEMBLY	DRAWING NUMBER: B-9567	REV. 6
DRAWN: BSL	CHECKED:				
SCALE: NONE	DATE: 9/29/95	PART NO.: EA101S	TOLERANCE CLASS: N/A		
REV. 6 PER CDC 95-127/BSL					